



Trenchless Drain Installation – Siam Shoreside Container Terminal

The installation of additional drainage to clear ponding areas in the heavily trafficked container yard at Lad Krabang terminal was awarded to Hammersmith based on an innovative Slab Sawing and Pit launched Directional Drilling proposal.

Based on pit launched drilling the area of the 450 mm thick concrete slab to be demolished in the trenching process was reduced to only eight 2.0m x 2.0m manhole / launch pit locations. This reduction alleviated one of the clients major concerns with regard to the long term suitability of trenching

The solution put forward by Hammersmith was within the budget set for trenching and afforded the client the additional benefit of solving the problem of re-routing traffic around the proposed drain runs during construction.

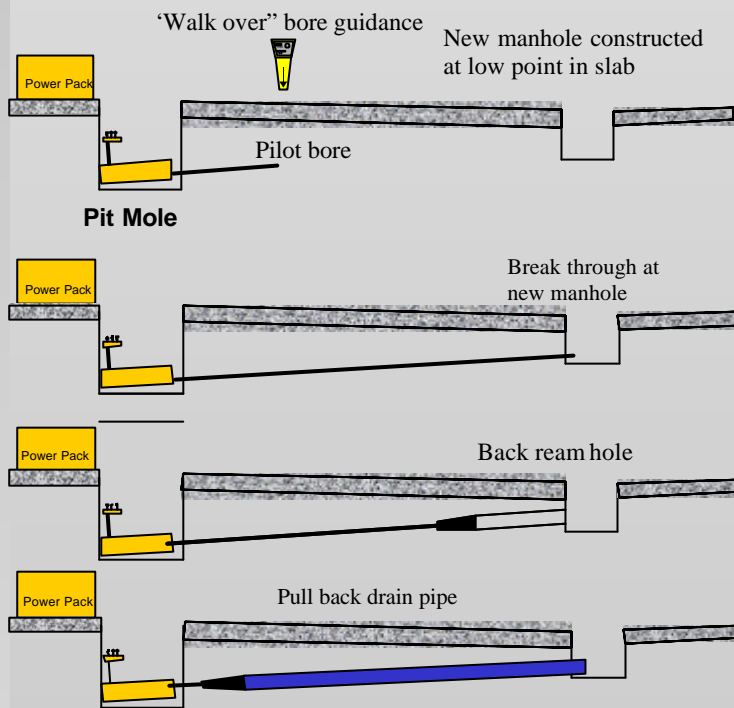

**“SPECIALIST SOLUTIONS
FOR THE
CONSTRUCTION INDUSTRY”**

HAMMERSMITH LIMITED

38/1 Soi Naphasap Yak 1 Sukhumvit Soi 36,
Klongtoey, Bangkok 10110 THAILAND

Phone: (662) 661 5962/3

Fax: (662) 661 5986

Email: email@hammersmithgroup.com

Web: www.hammersmithgroup.com

PROJECT DETAILS

Project Title

Trenchless Drainage Installation to Container Yard

Client

Siam Shoreside Services Ltd

Project Details

Construction of 8 new man holes and interconnecting 350mm diameter drain system. Approx. 90lm of pipe installed by Pit Launched Directional Drilling

Completion Date

April 2002